CBM4022 DOT MATRIX PRINTER

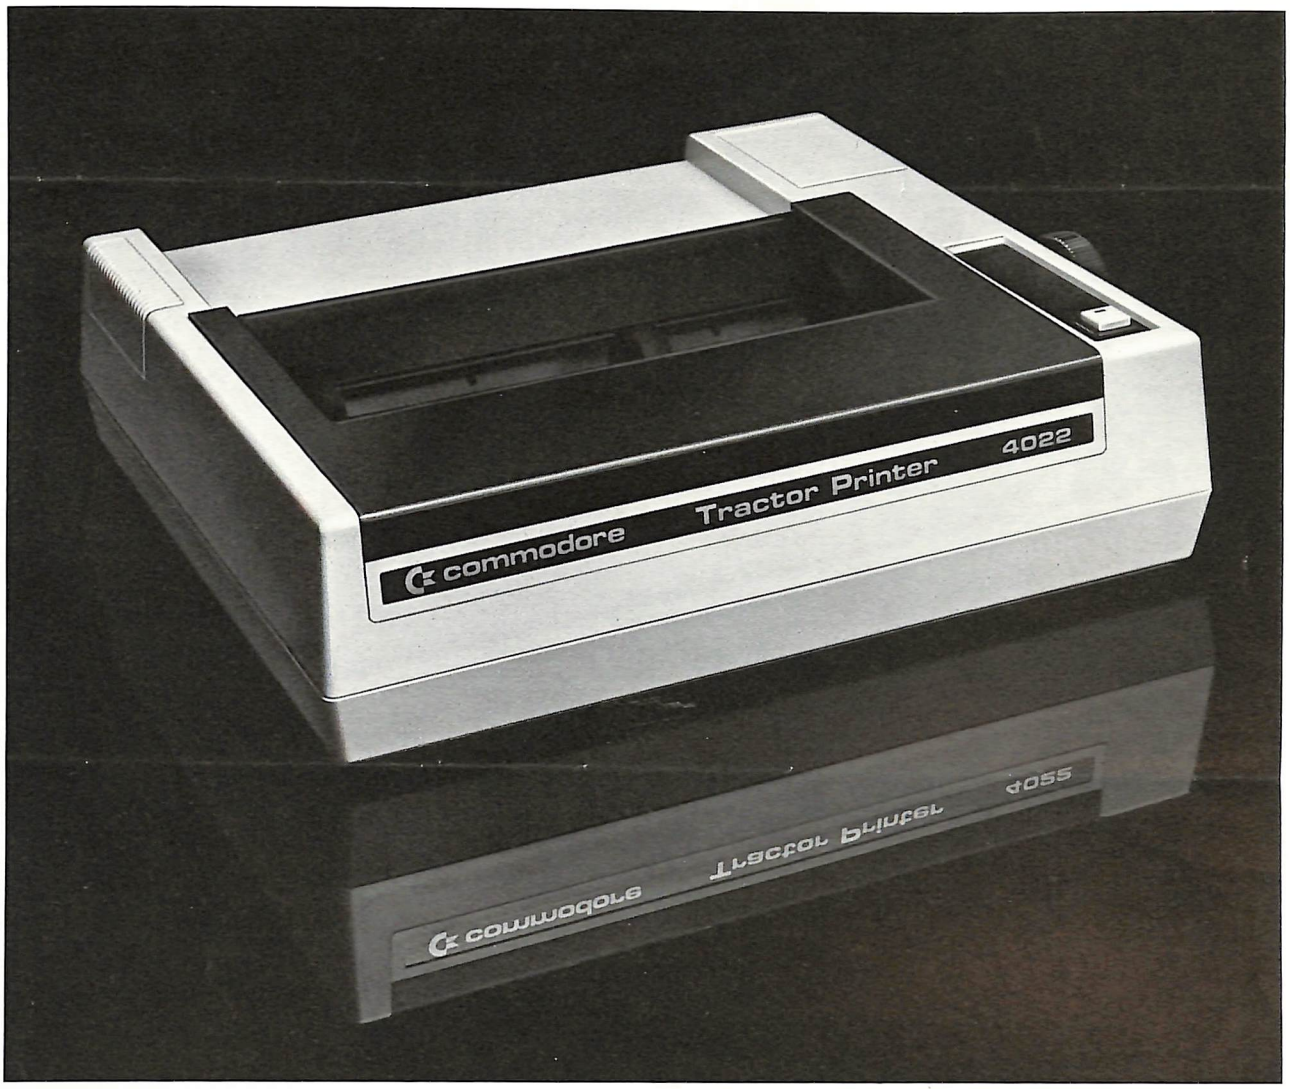

Print information from your computer reliably and economically

The CBM 4022 dot-matrix printer complements the Commodore 4000 series with a versatile printer that is easy to use and extremely reliable in operation.

A dot-matrix printer constructs printable characters as a series of dots within a resolution of a 5 × 8 matrix.

All characters are easy to read and graphics symbols can be used to print pictures, bar charts, graphs etc.

Many printer options are provided for the user, which can be selected under program control.

Formatting of columns and figures is handled automatically by printing to previously defined formats stored in the printer.

The CBM 4022 is simply connected to any Commodore computer via the IEEE port and all logic and formatting features require no memory overheads from the host computer.

commodore COMPUTER

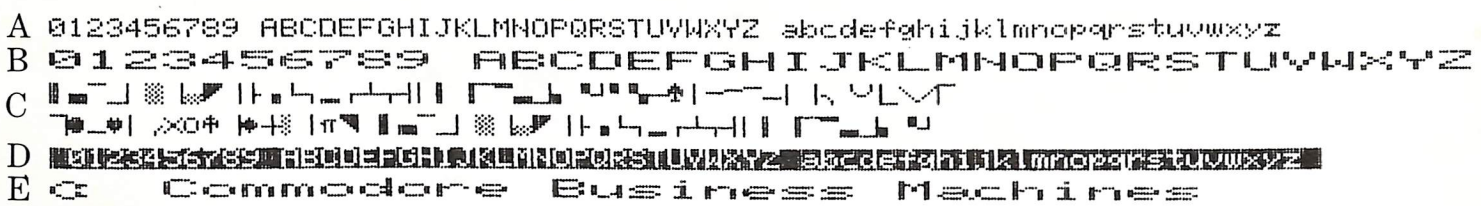

A Standard Print
B Expanded Print
C Graphics
D Reverse Print
E User Defined Character

Commodore 4022 Dot Matrix Printer

Specifications

CONTROL OPTIONS

0 Print data exactly as received
1 Print data according to a previously defined format
2 Store the formatting data
3 Set the number of lines per page
4 Enable the printer format diagnostic messages
5 Define a programmable character
6 Set spacing between lines
7 Upper/lower case mode
8 ASCII/graphics mode
9 Supress diagnostic message printing
10 Reset printer

Printing Method	**Serial Impact Dot Matrix**
Print Rate	60 lpm with 80 columns printed 100 lpm with 40 columns printed 160 lpm with 20 columns printed
Print Direction	Bi-directional with logic seek
Column Capacity	80
Character Font	5 × 8 dot matrix
Column Spacing	1/10 inch (10 characters per inch)
Line Spacing	Programmable (standard 6 lines per inch)
Character Size	.11 inch high, .08 inch wide
Copies	3, including original
Ribbon Type	Cartridge
Ribbon Life	2 million characters
Paper Width	10 inch computer folded paper
Forms	8.5 inch plus .5 × 2 (sprocketed margins) Pin to pin distance: 5 inches longitudinally 9½ inches laterally 5/32 inches diameter

SPECIAL CHARACTER FUNCTIONS

Enhanced characters
Paging on or off
Reverse character printing

SELF TEST MODE

Diagnostic test on power-up
Self test feature to print all characters
Error indicator LED

POWER REQUIREMENTS

Volts : 240 VAC
Cycle : 50 Hz
Watts : 100 W

PHYSICAL SIZE

Height : 100mm (4 inches)
Width : 380mm (15 inches)
Depth : 320mm (12½ inches)
Shipping Weight : 9.2kg (20 lb)
Shipping Dimensions : 530 × 460 × 200mm (21 × 18 × 8 inches)

ACCESSORIES

Code 113020 PET to IEEE cable
- connects peripheral devices to the host computer.

Code 113030 IEEE to IEEE cable
- connects peripheral devices to other peripheral devices.

Code 521010 4022 Cartridge Ribbon
- fabric ribbon for printer.

commodore COMPUTER

Commodore Information Centre
P.O. Box 336, Artarmon, NSW 2064 Australia.
Telephone (02)437 6296

E.A. MICROCOMP
4th Fl., 561 Bourke St.
Melbourne, 3000
614 1433, 614 1551

Specifications subject to change without notice Code 612122